

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

	REVISIONS						
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED		
Α		CH'D DIM WAS Ø4.51 IS (Ø4.50), CH'D BOM FROM Ø5 TO Ø4-1/2.	9/28/2012	RJC	SE		
2	16-0241	DELETED DIM .315, ADDED DIM .079.	12/1/2016	RJC	SM		



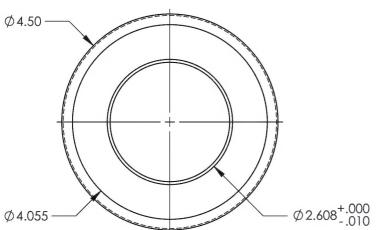

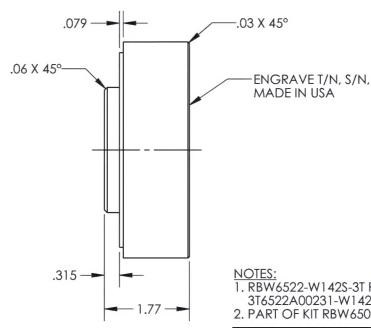

1. RBW6522-W142S-3T REPLACES AGUSTA T/N 3T6522A00231-W142S.

2. PART OF KIT RBW6505G00231-3T.

MAT'L 6061

TGB/MAST OUTPUT OIL SEAL ASSEMBLY SUPPORT TOOL

RBW6522A00231-W142S-3T

	UNLES	SS OTHERWISE SPECIFIED
		ENSIONS ARE IN INCHES
XX	± .00	5 FRACTIONS ± 1/8
х	± .01	ANGLES ±.5°
	Ŧ .1	SURFACES = 125/

2

HEAT TREAT FINISH BLACK ANODIZE SPEC MIL-A-8625F, TYPE II, CLASS II DRAWN BY: PERRITT

1. BREAK ALL SHARP EDGES .015 x 45 'OR .015R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING 3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009 CHECKED: DUERFELDT OPPS APPR: ANDERSON

QA APPR: USED ON MODEL LINDSAY APPROVED: MACKOVJAK AW139 SCALE DATE 1:2 10/5/2010 SHEET 1 OF 1

ASSY QTY	ASSY QTY	B/O	Part #	UNIT	Description	Material	B/O INFORMATION OR SPECIFICATIONS	PG.
				1	SEAL SUPPORT	6061		